

Fig. 1

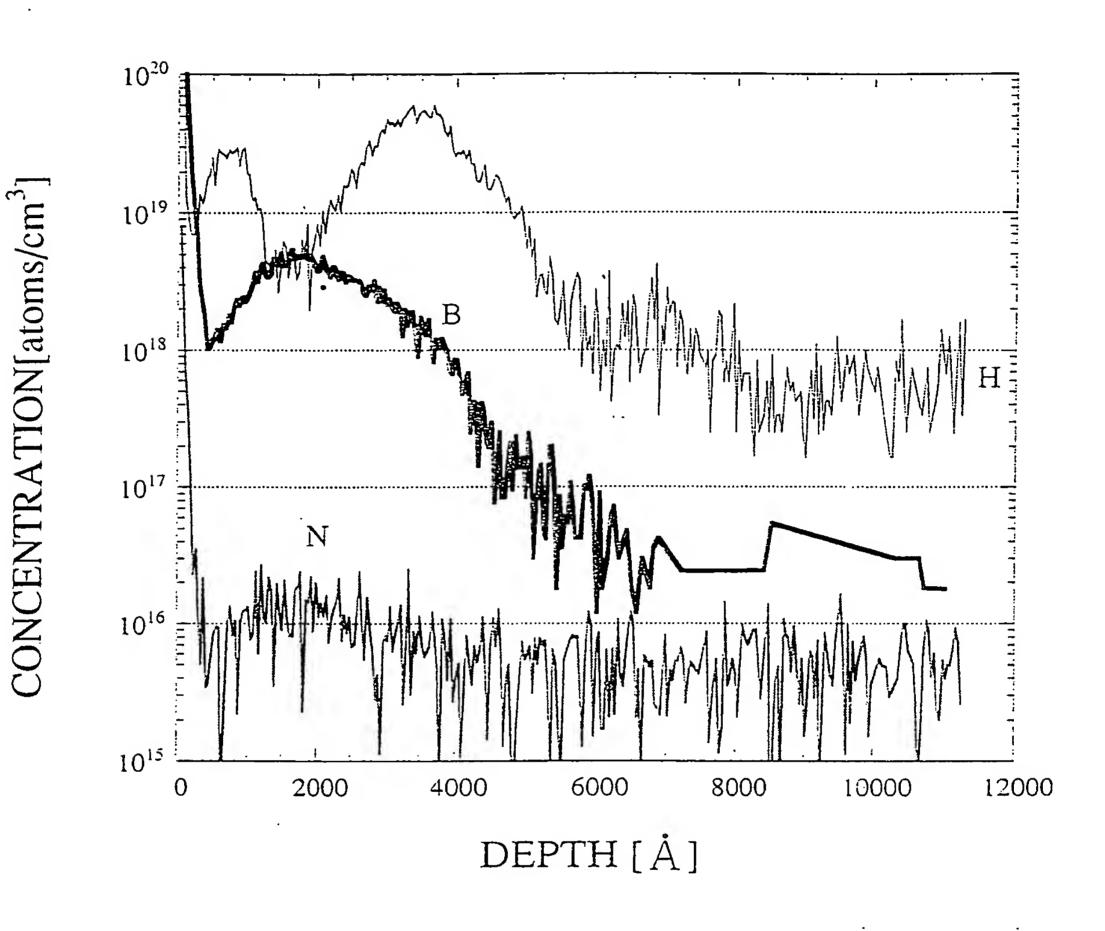


Fig. 2



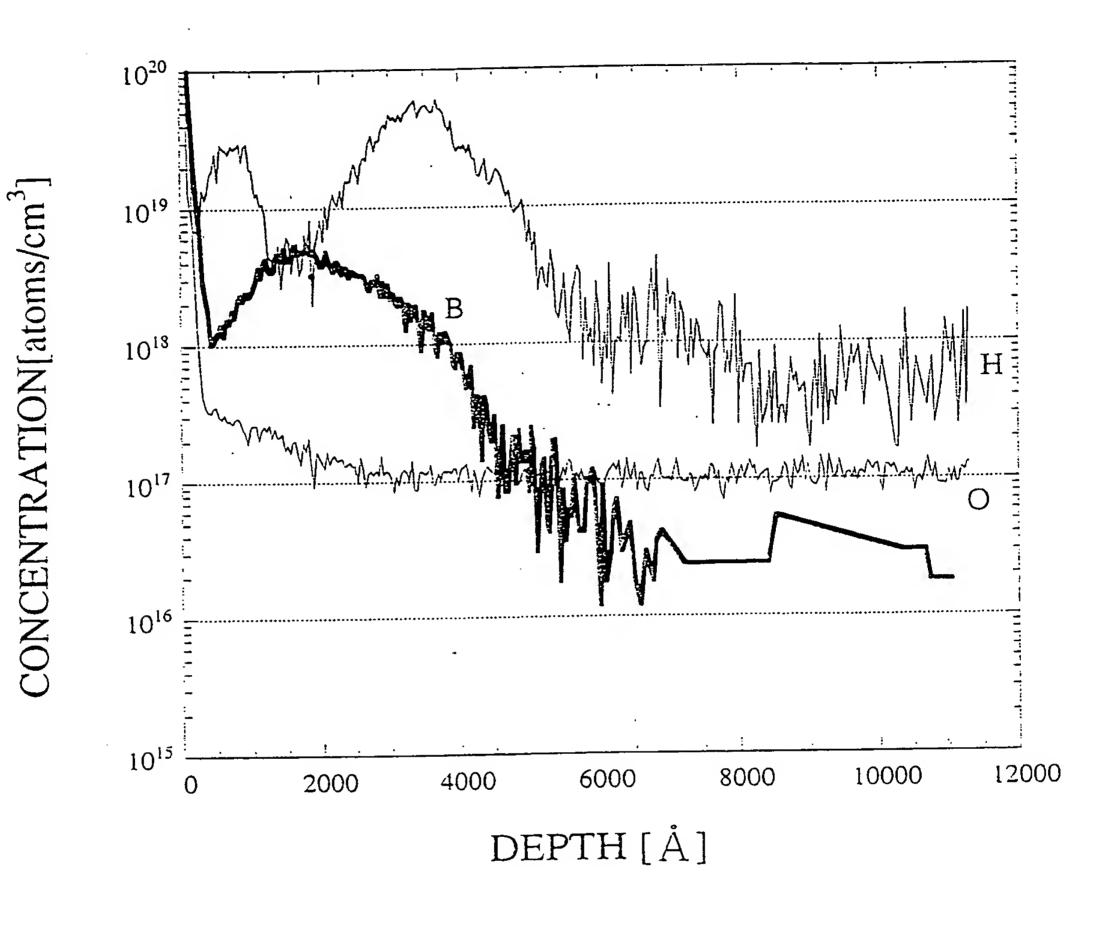



Fig. 3

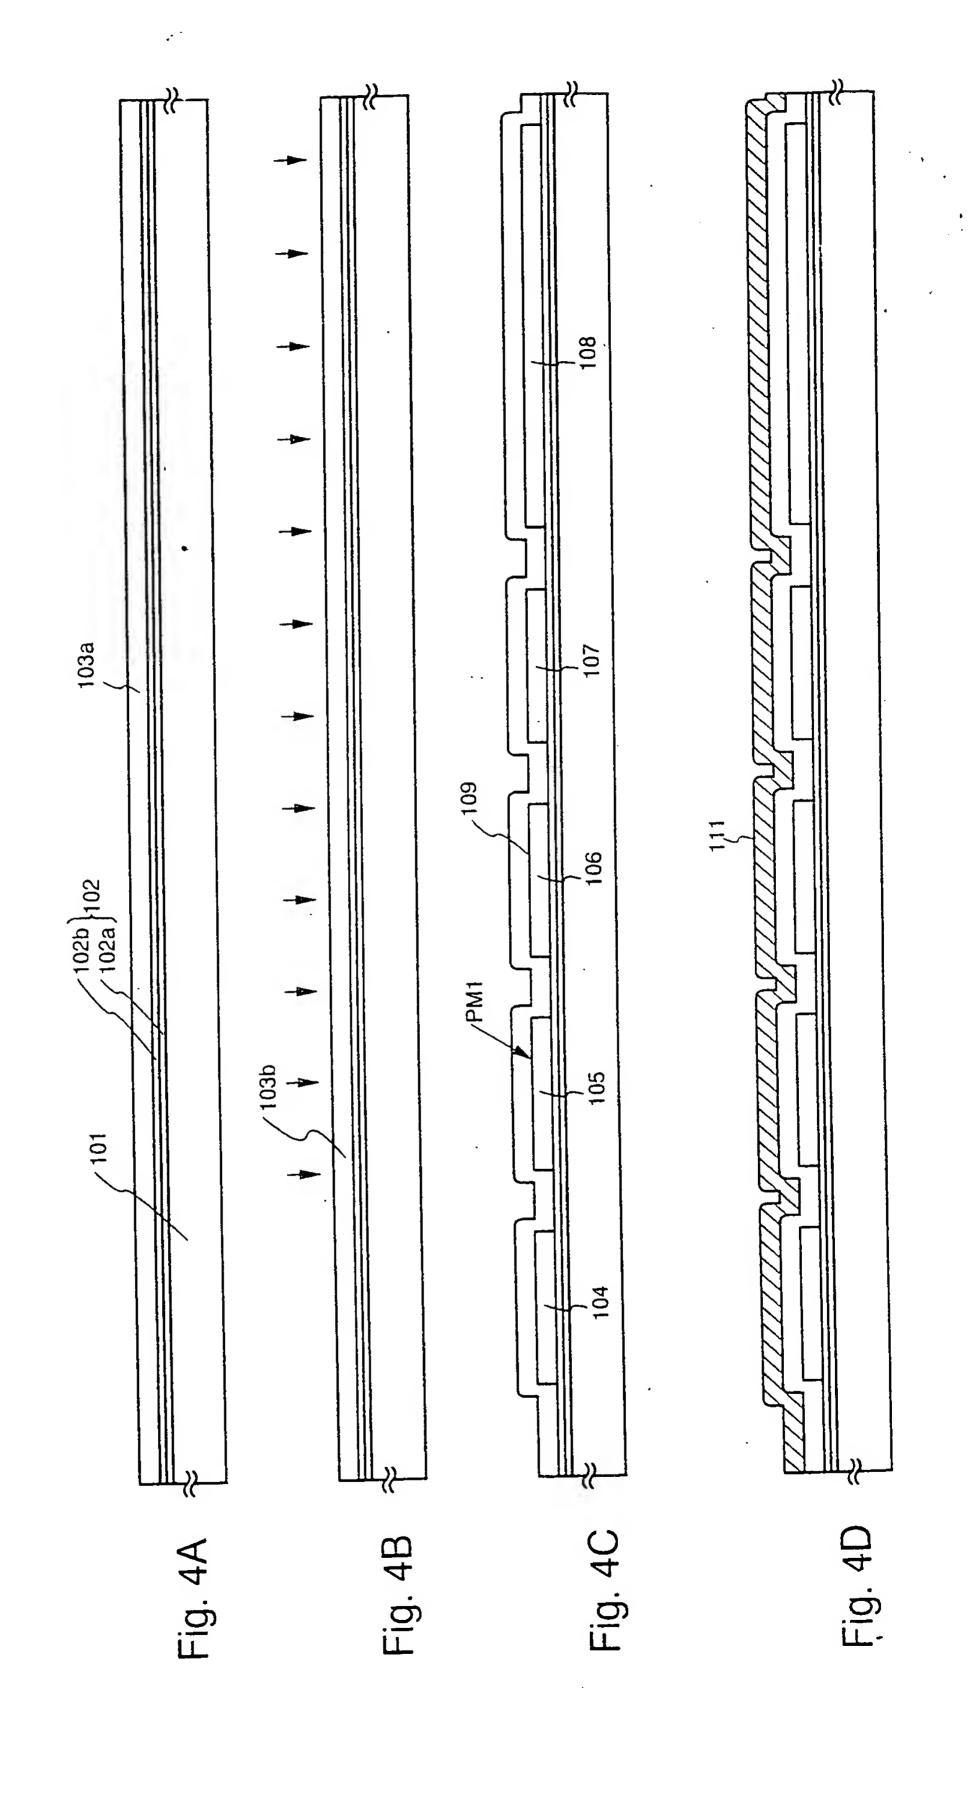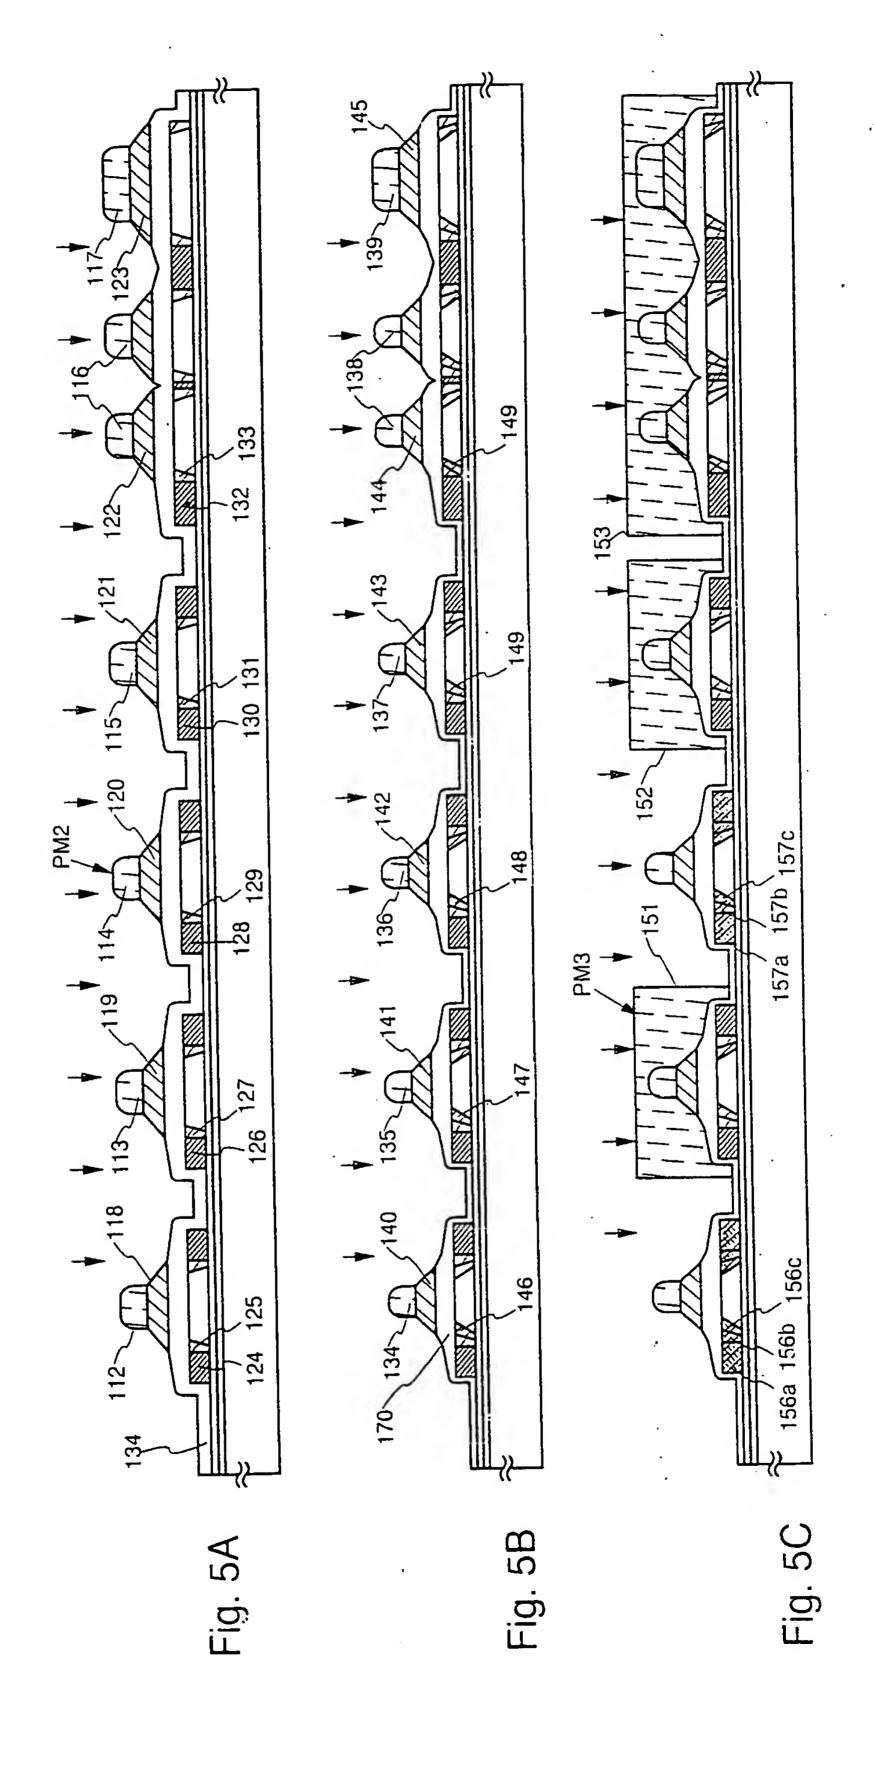



.....


• ::•




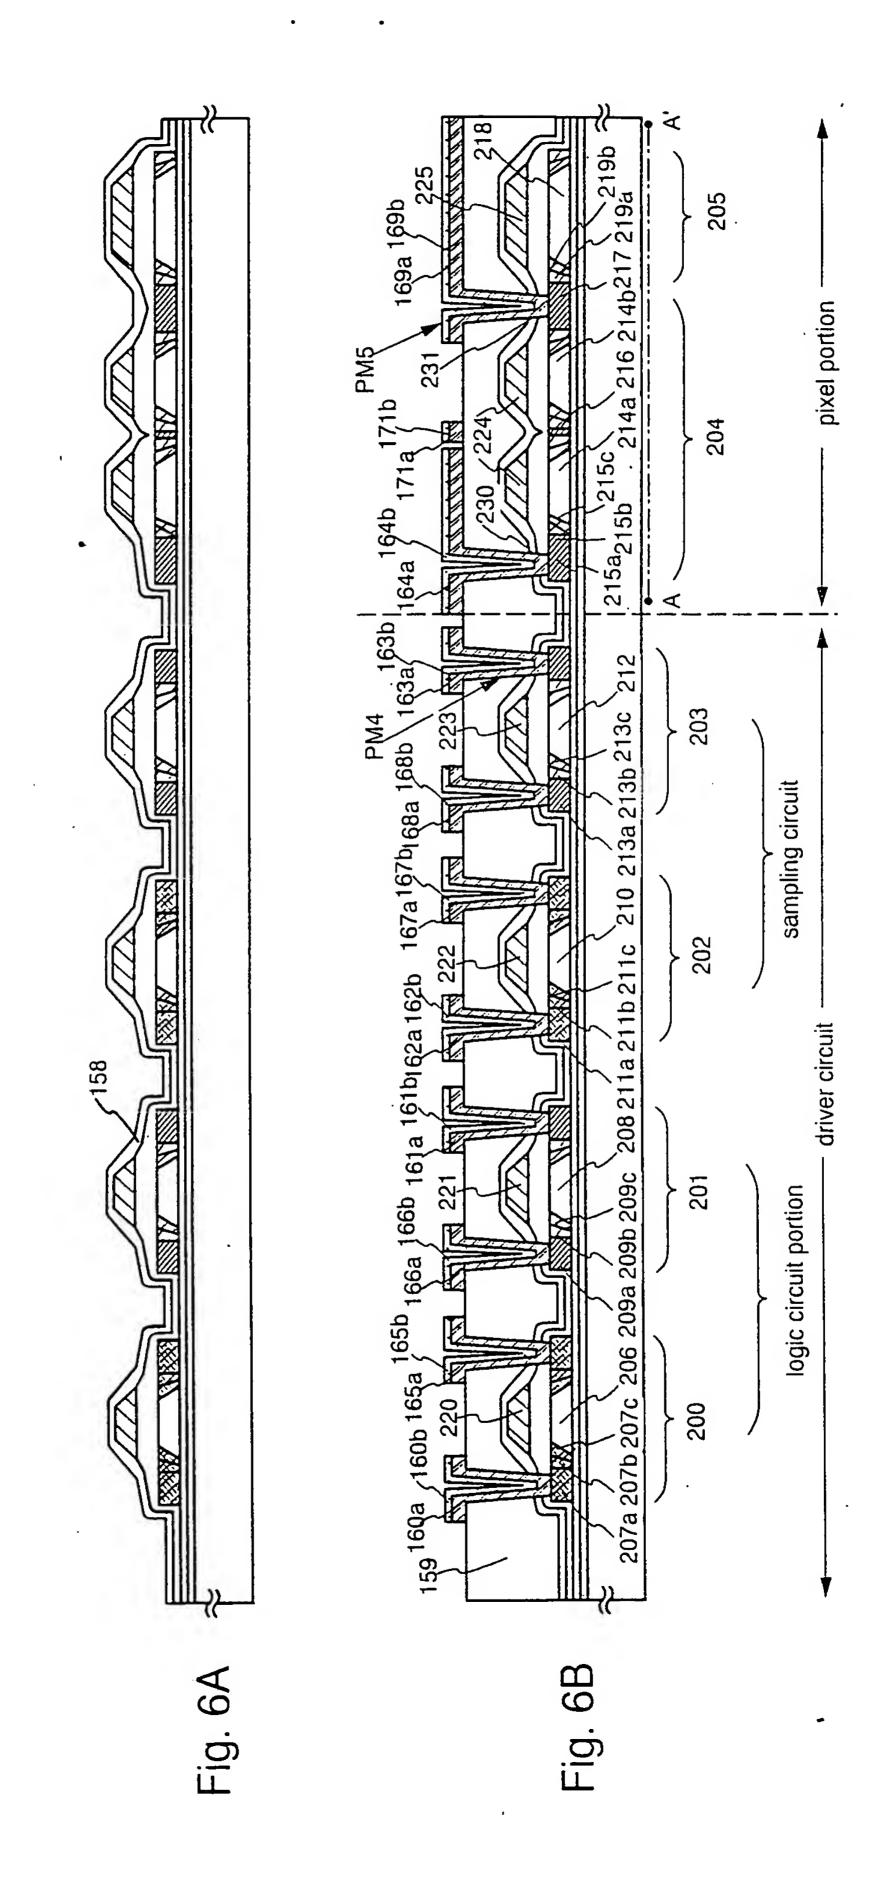


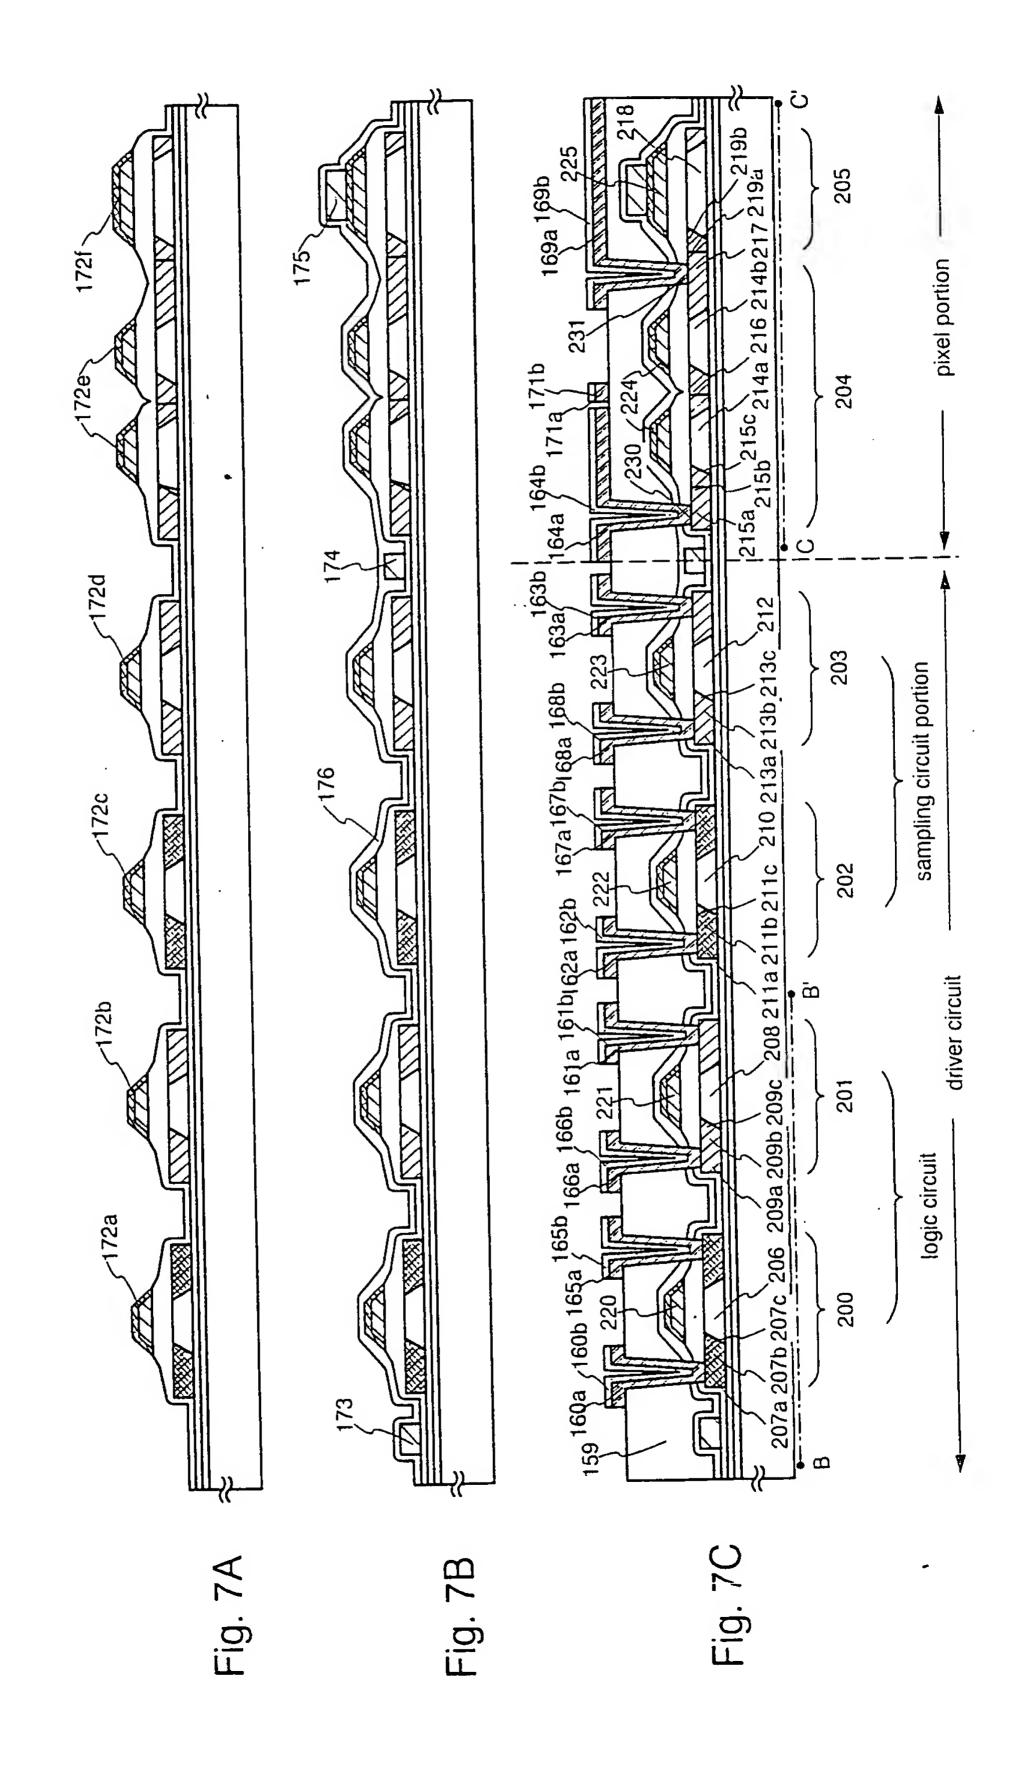


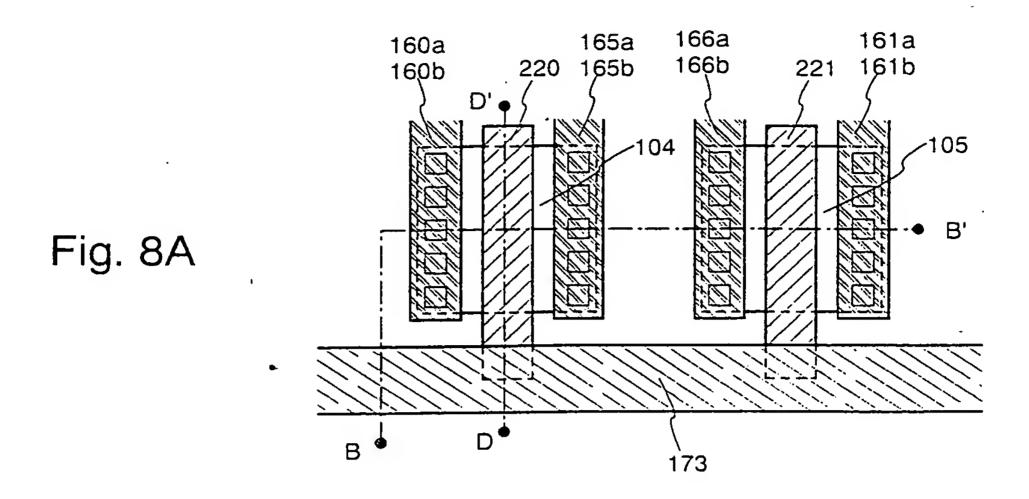


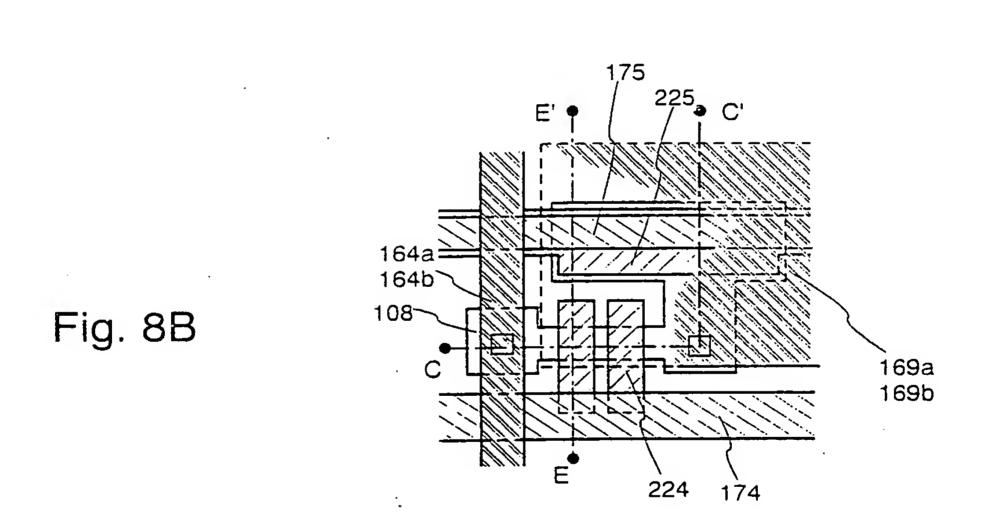


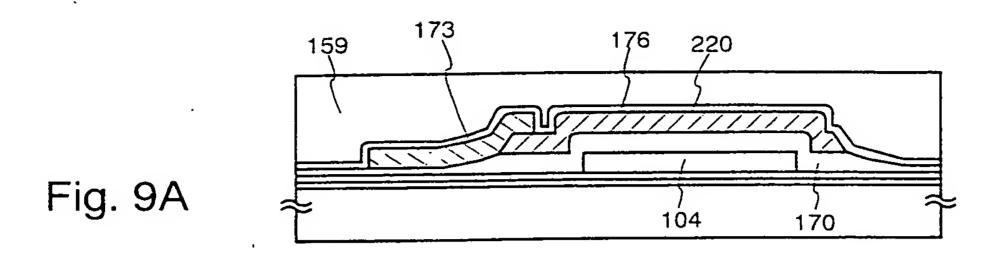

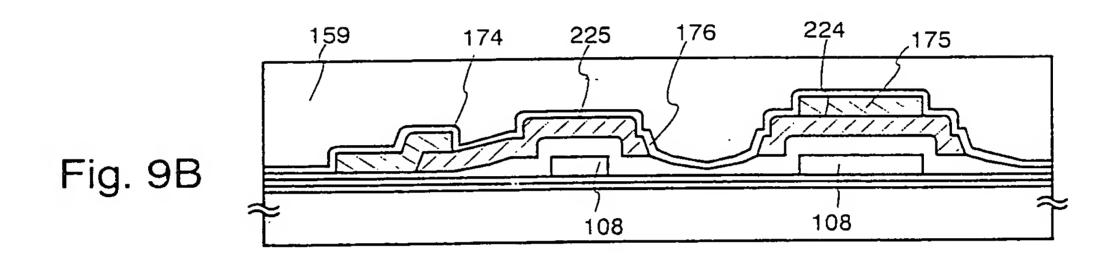

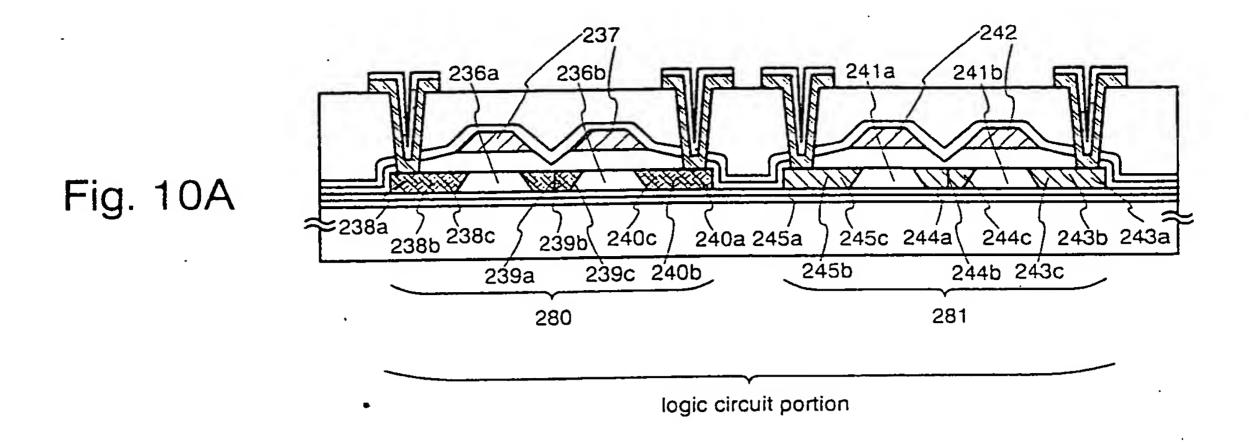

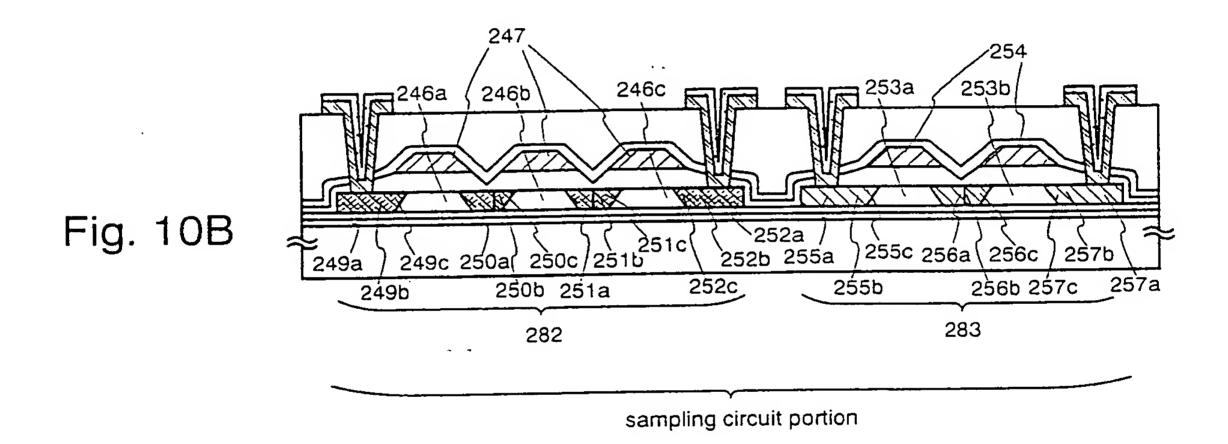

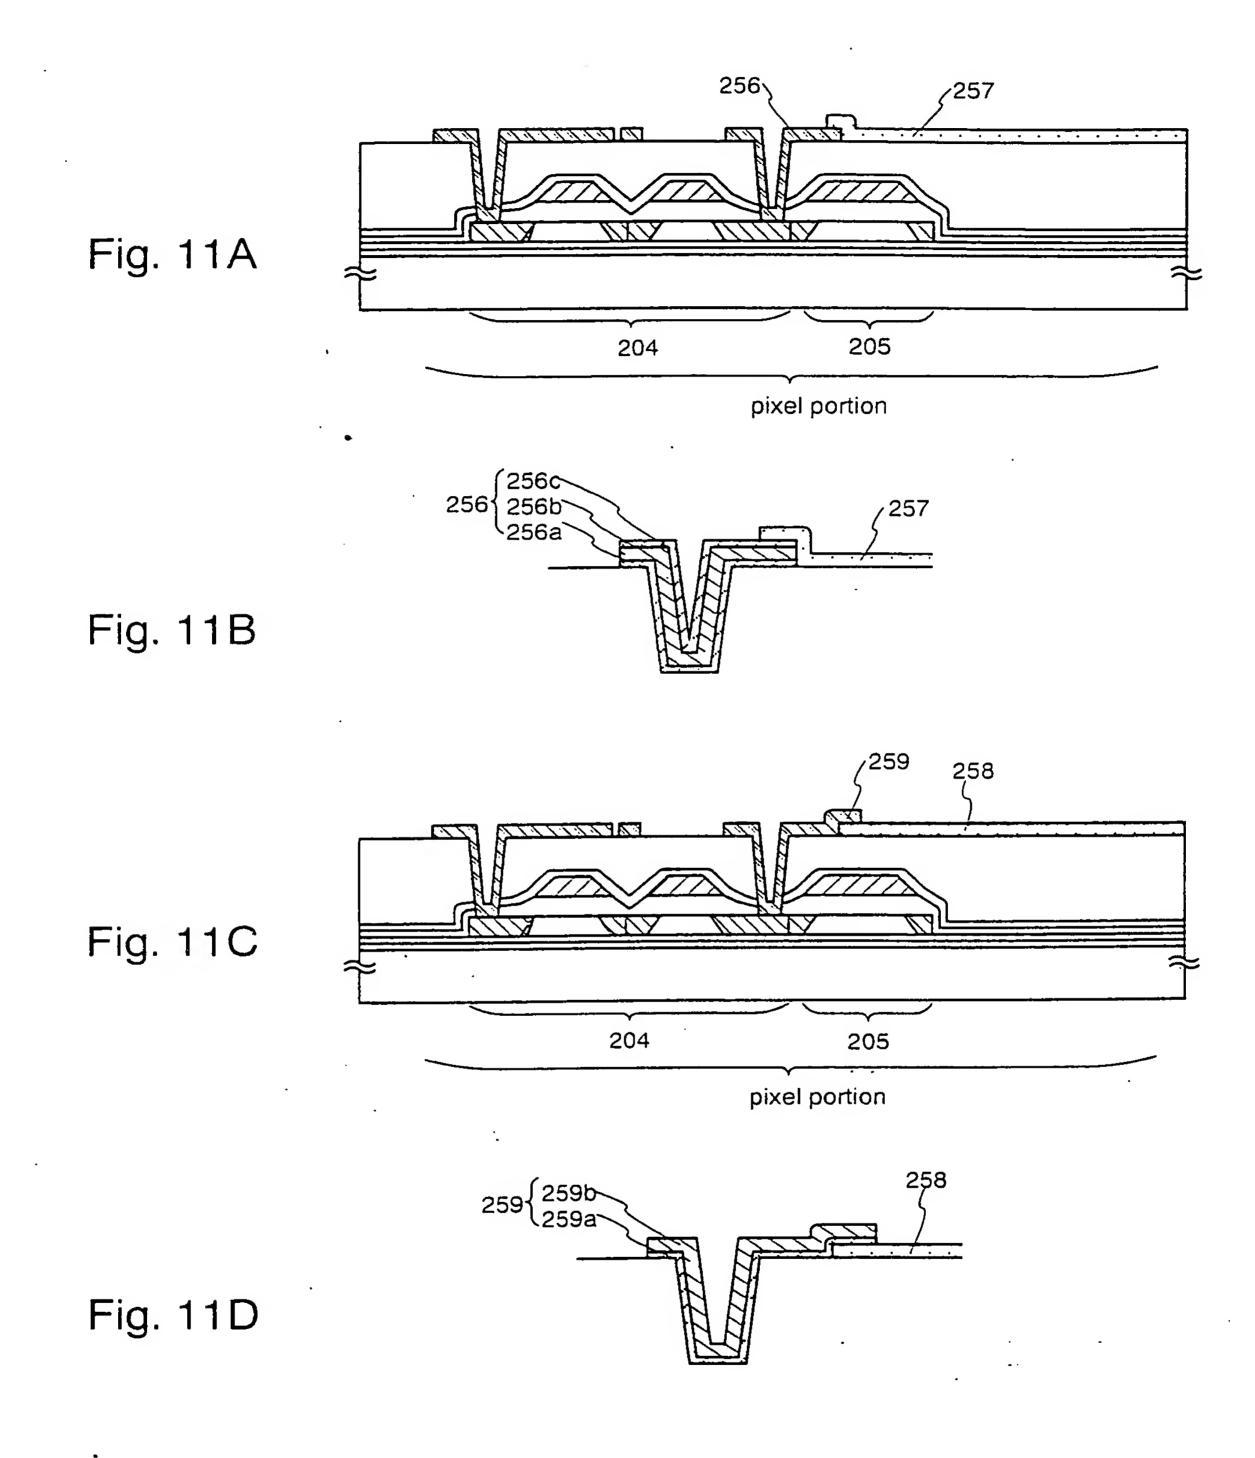



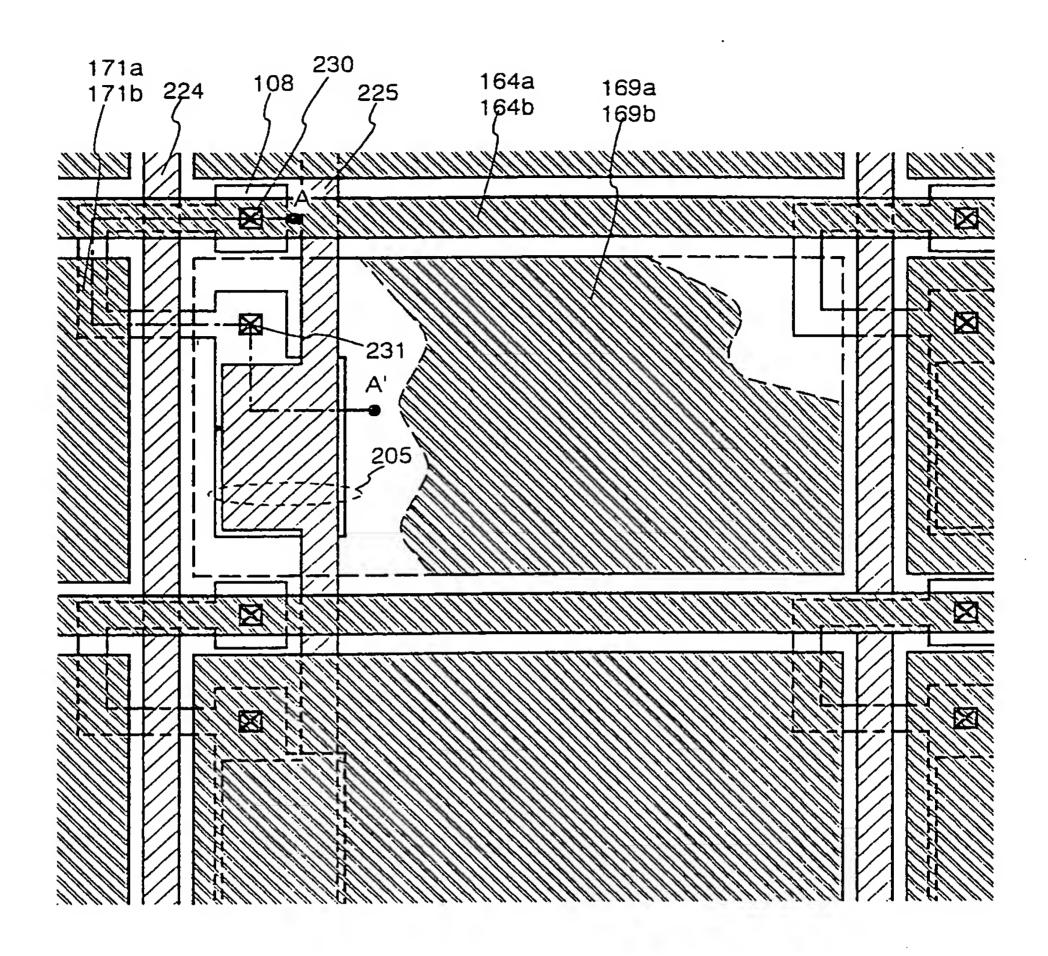


Fig. 12

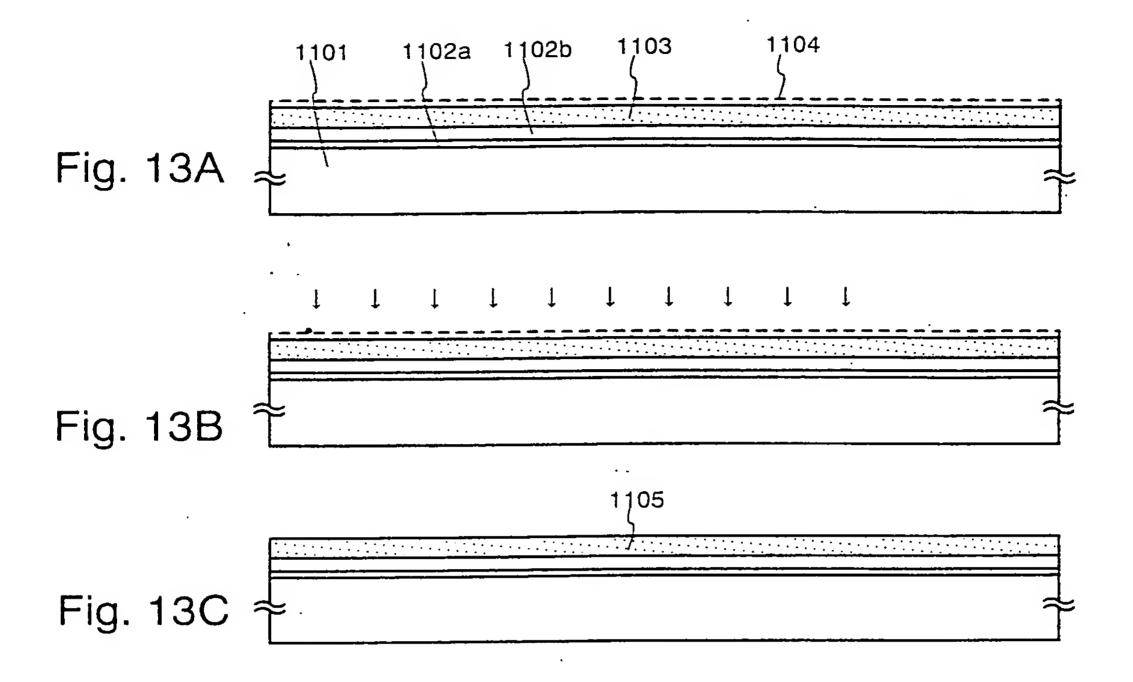

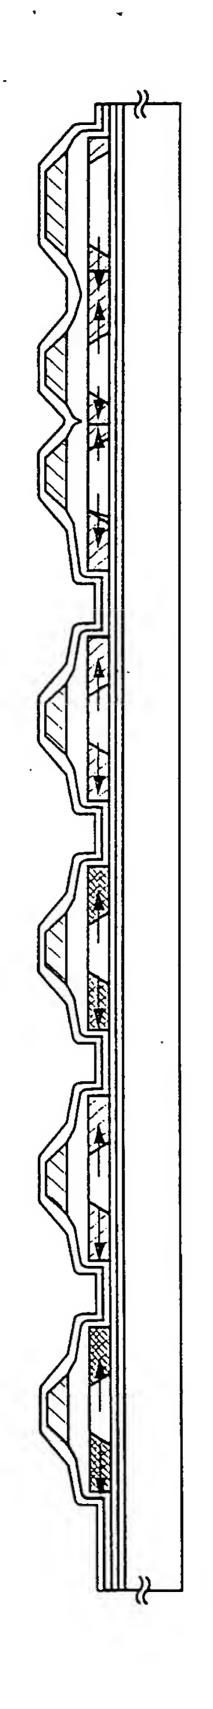

-ig. 14

٠,

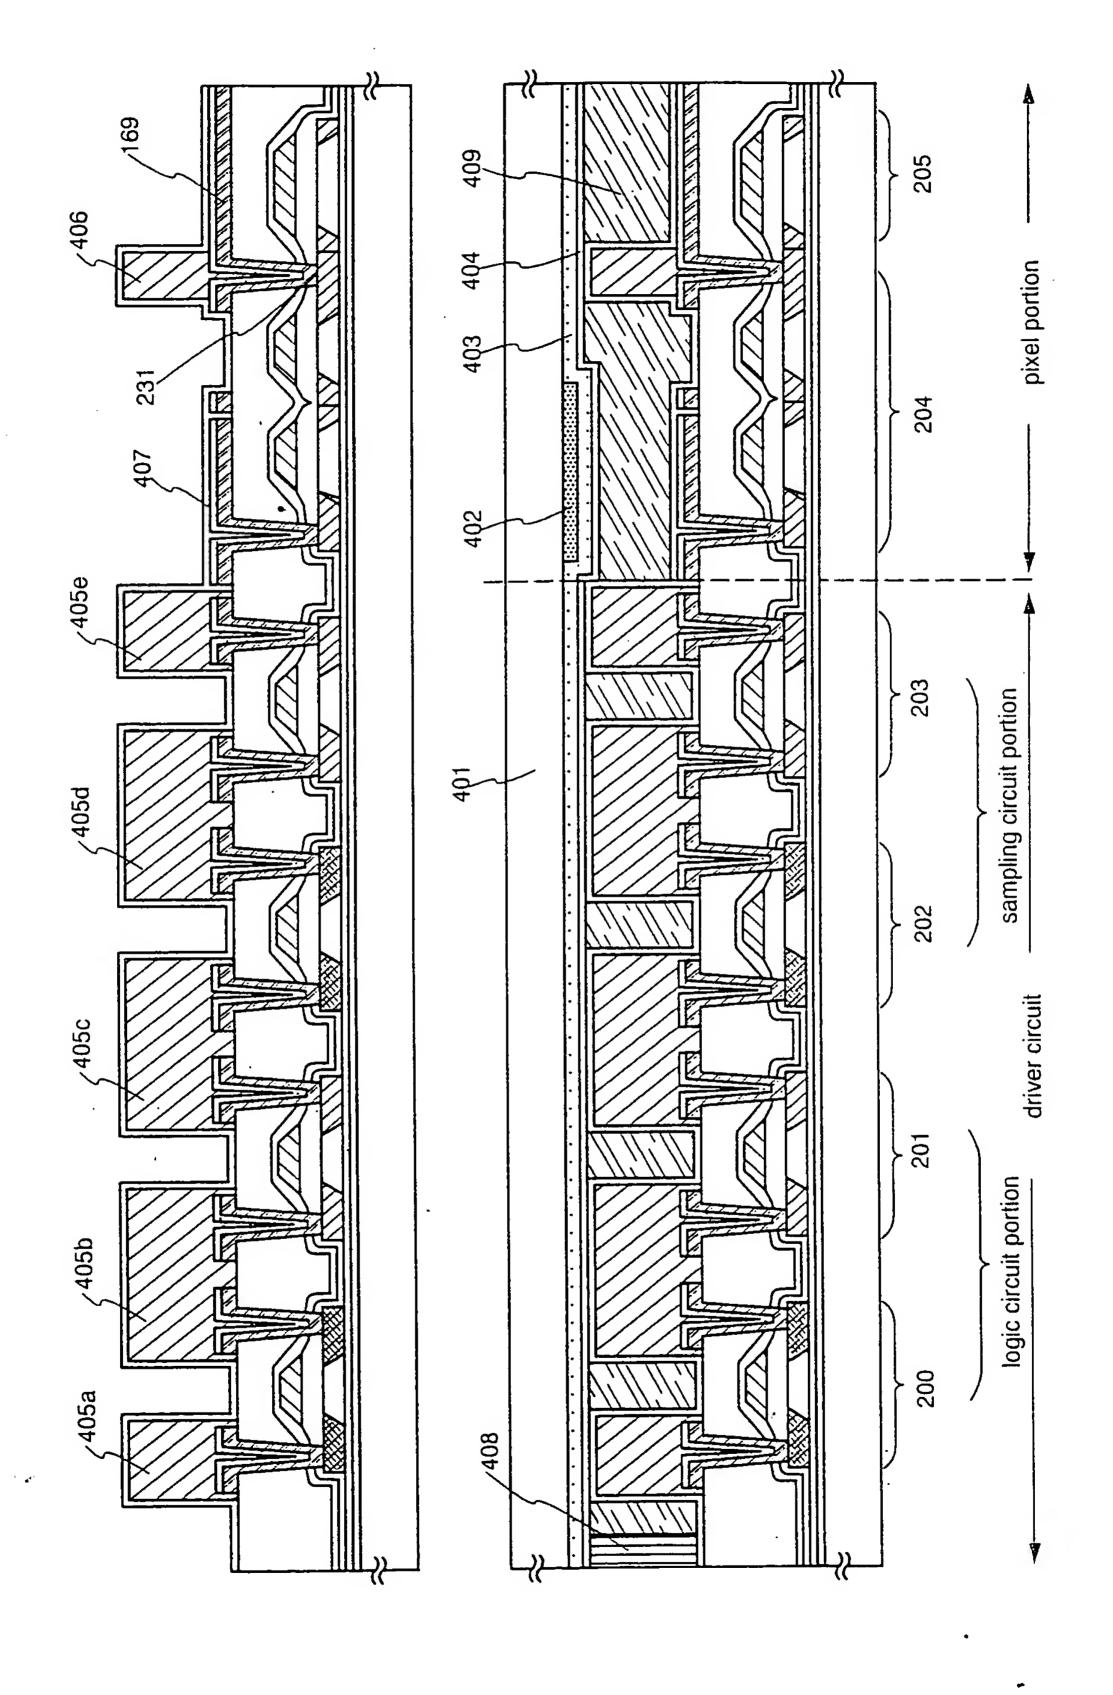


Fig. 15

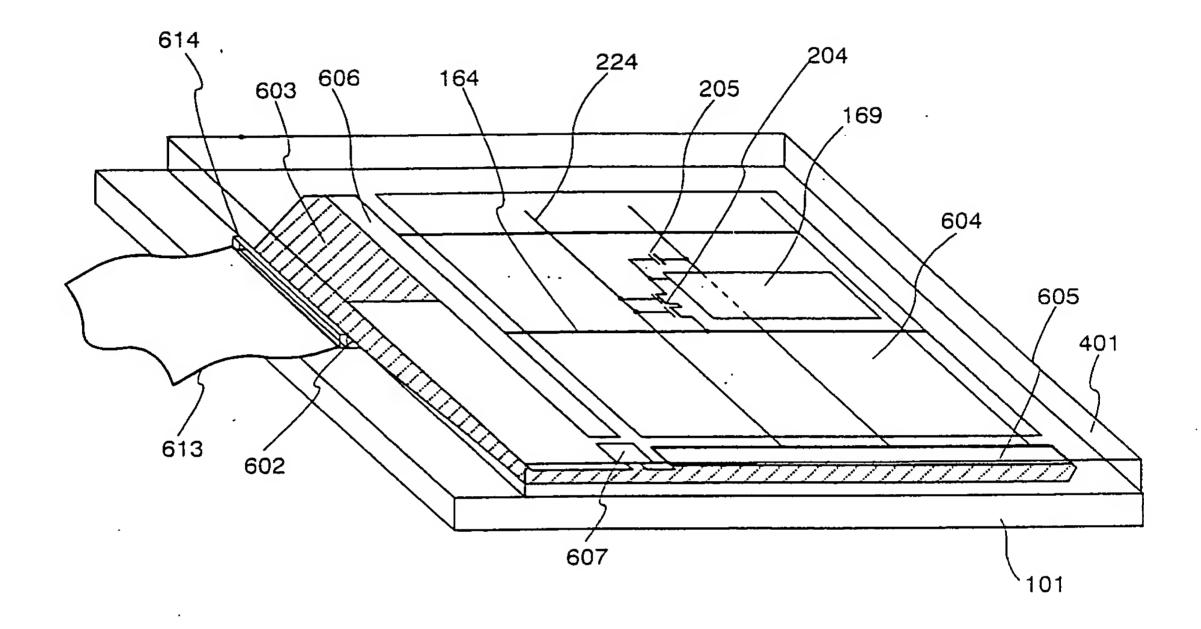
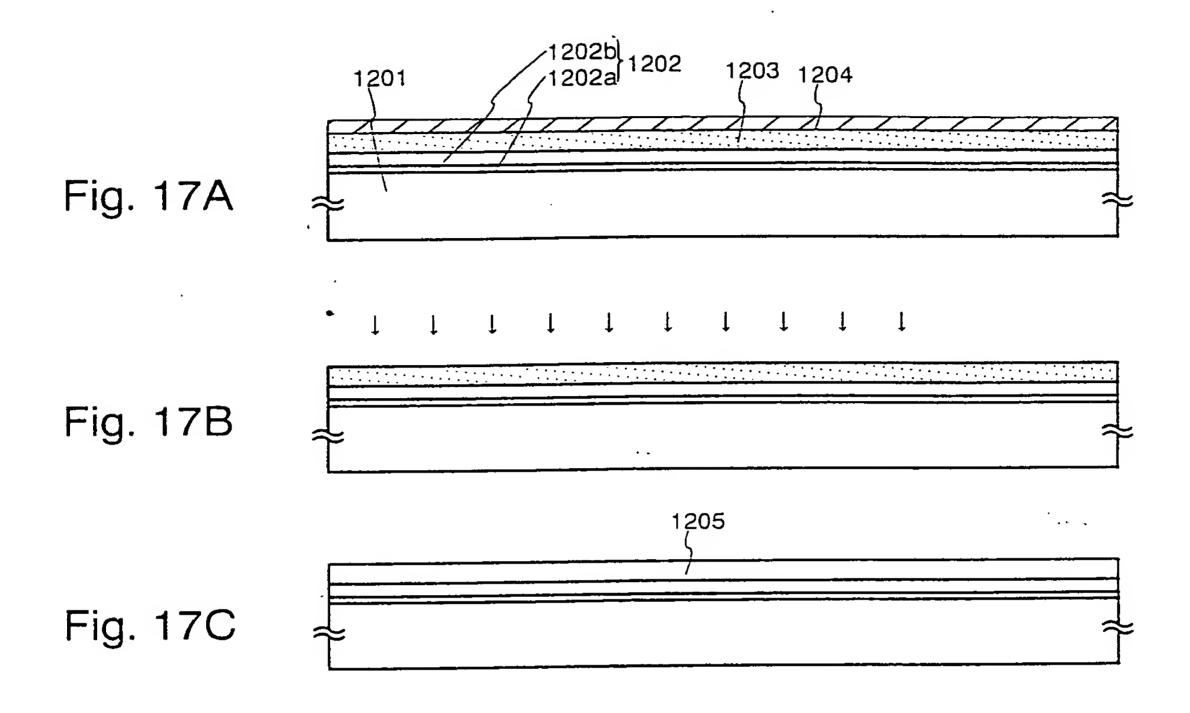


Fig. 16

· · · - · ·



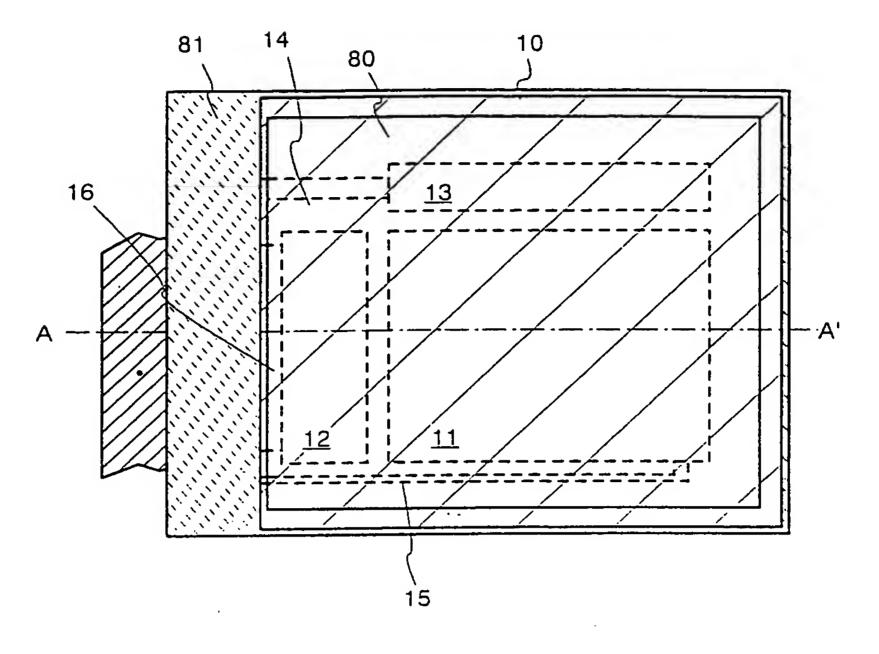


Fig. 18A

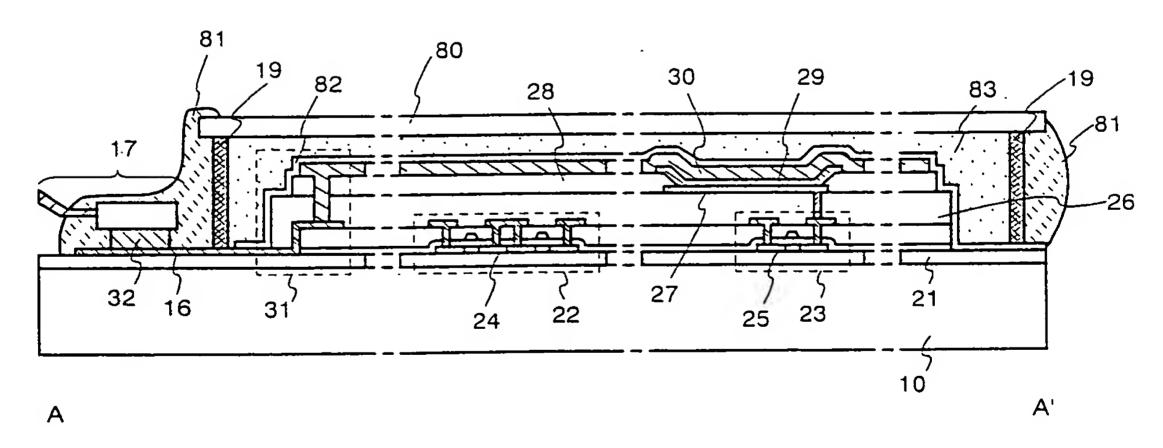


Fig. 18B

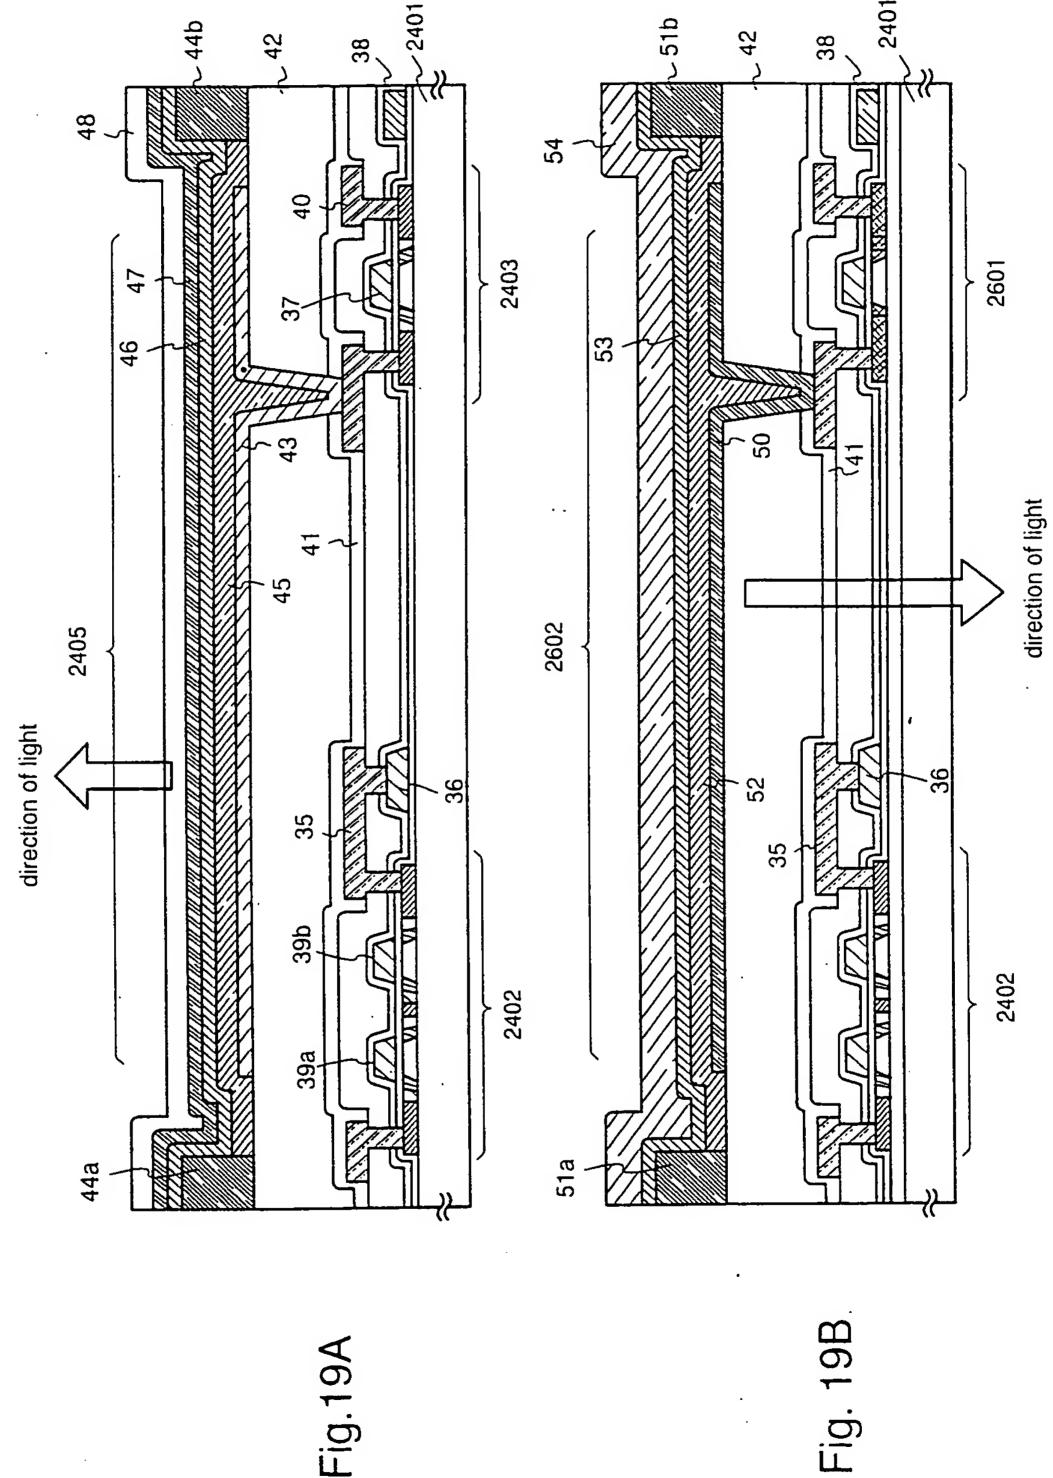
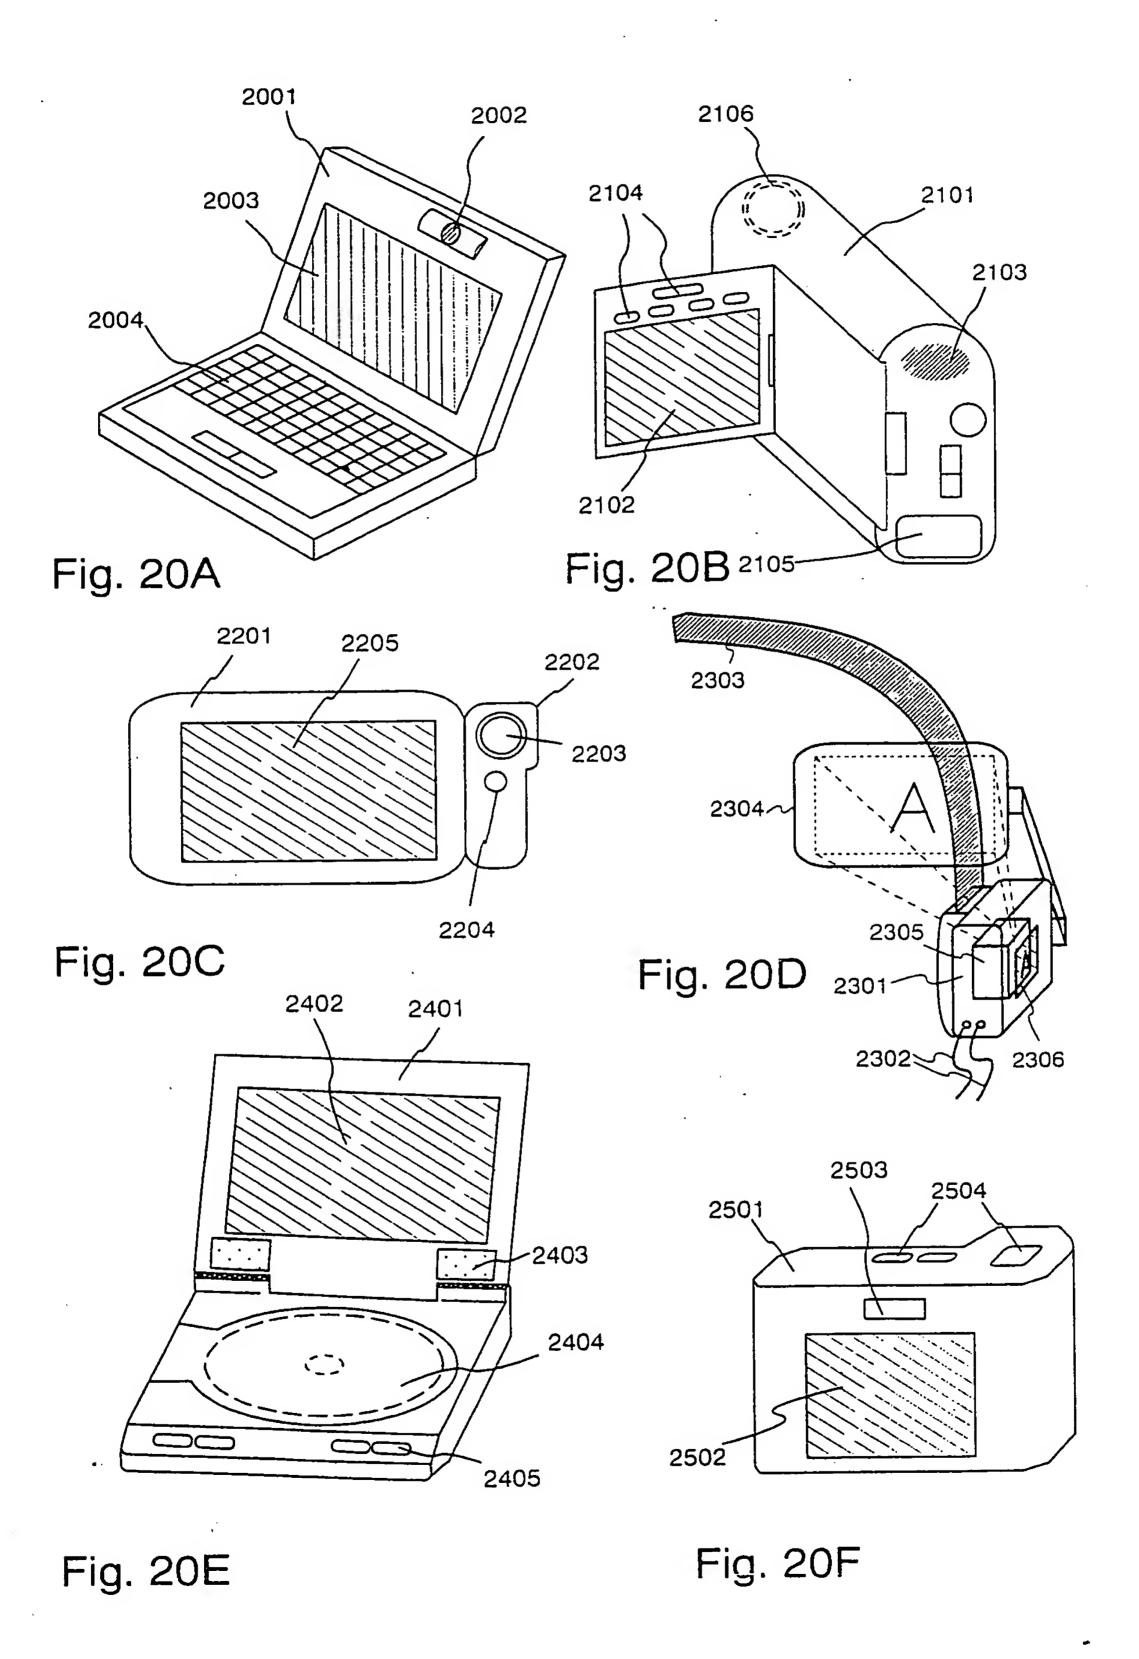


Fig.19A



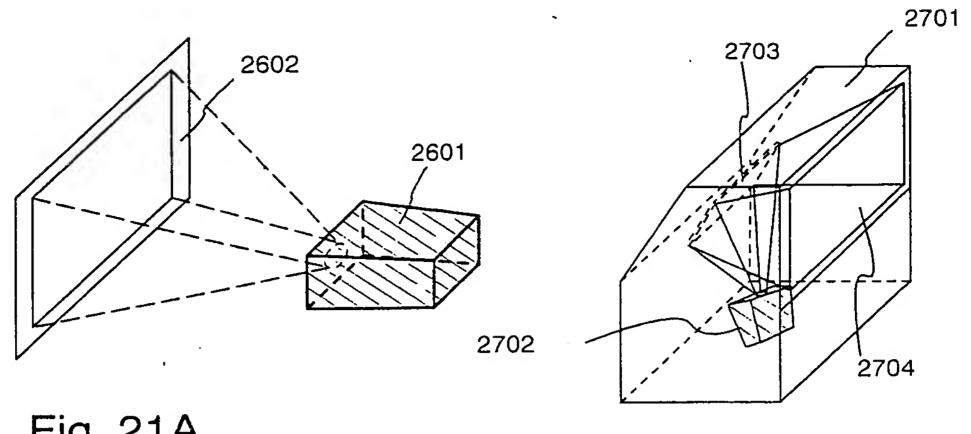


Fig. 21A

Fig. 21B

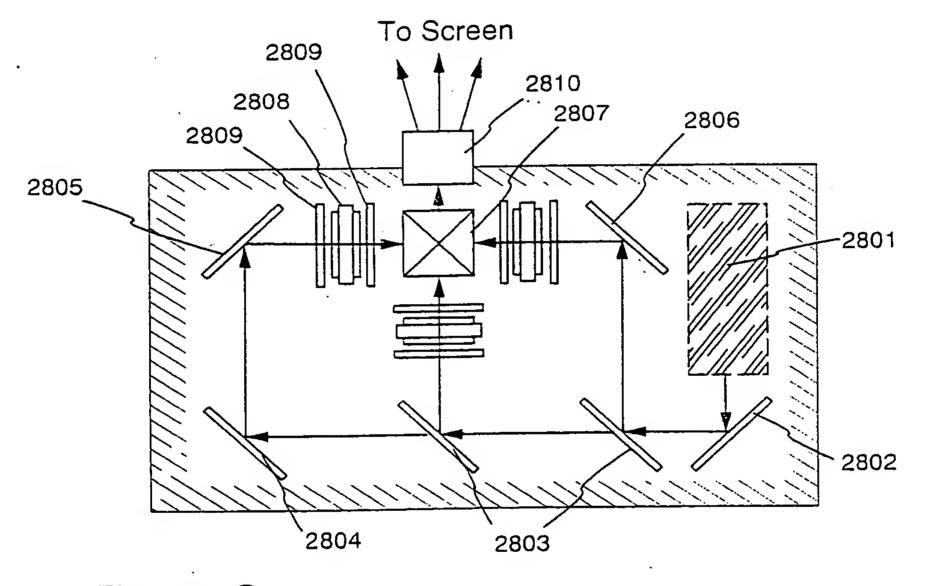


Fig. 21C

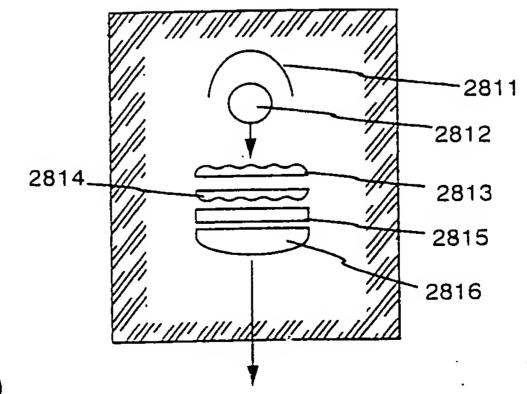
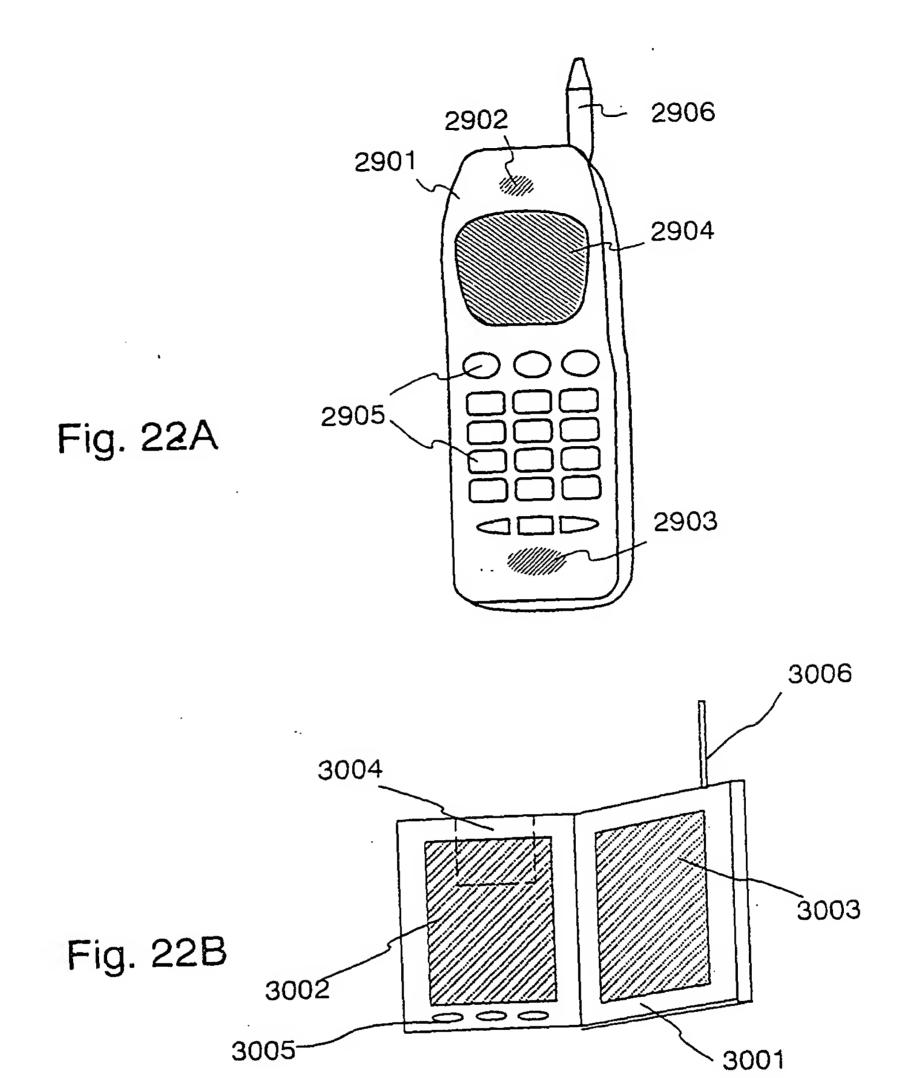
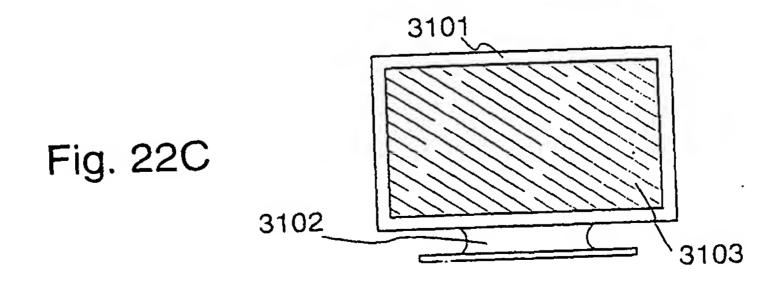


Fig. 21D





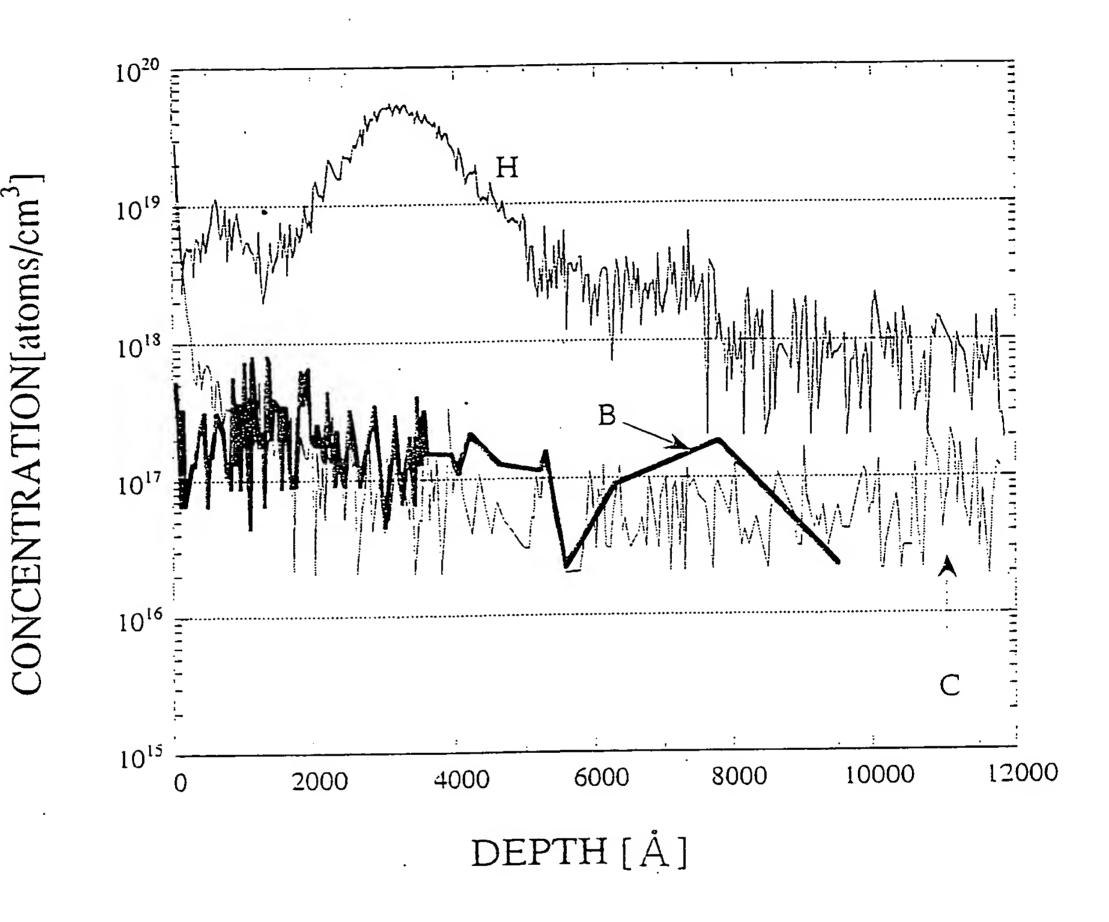


Fig. 23

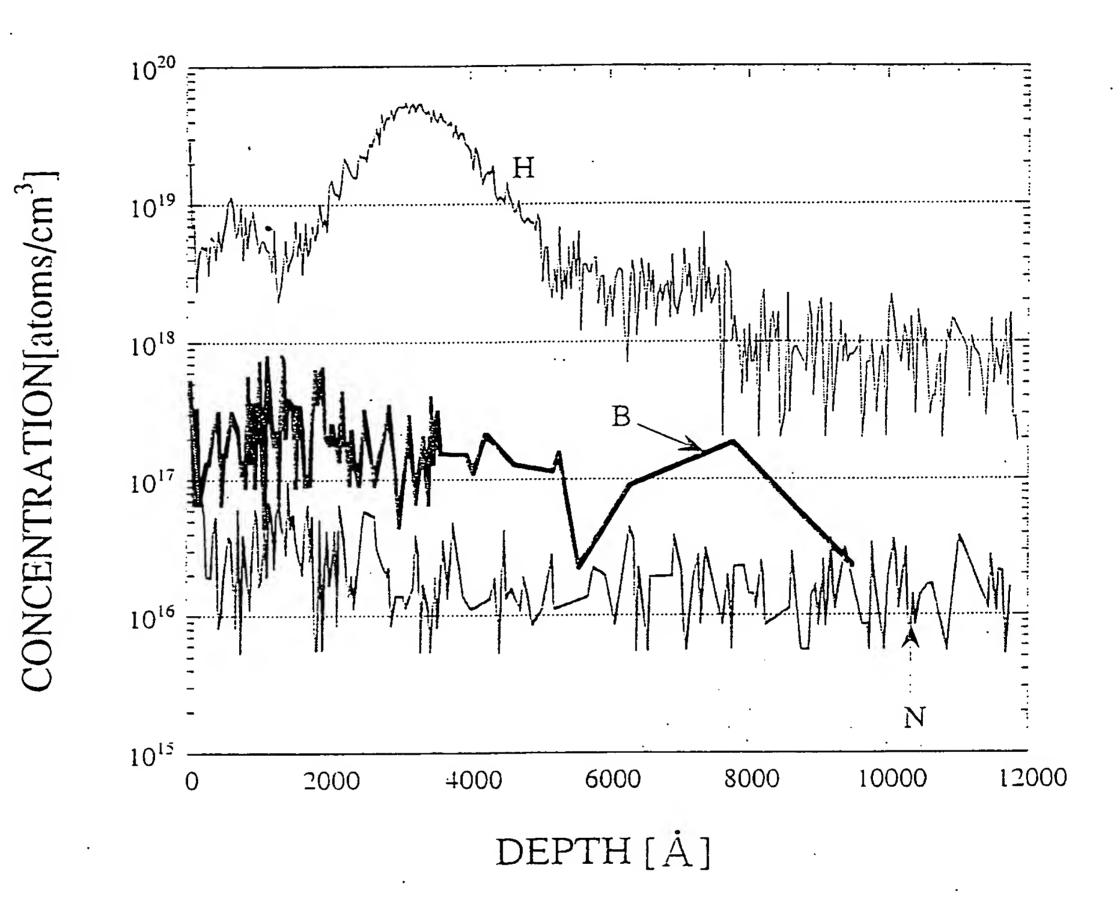


Fig. 24

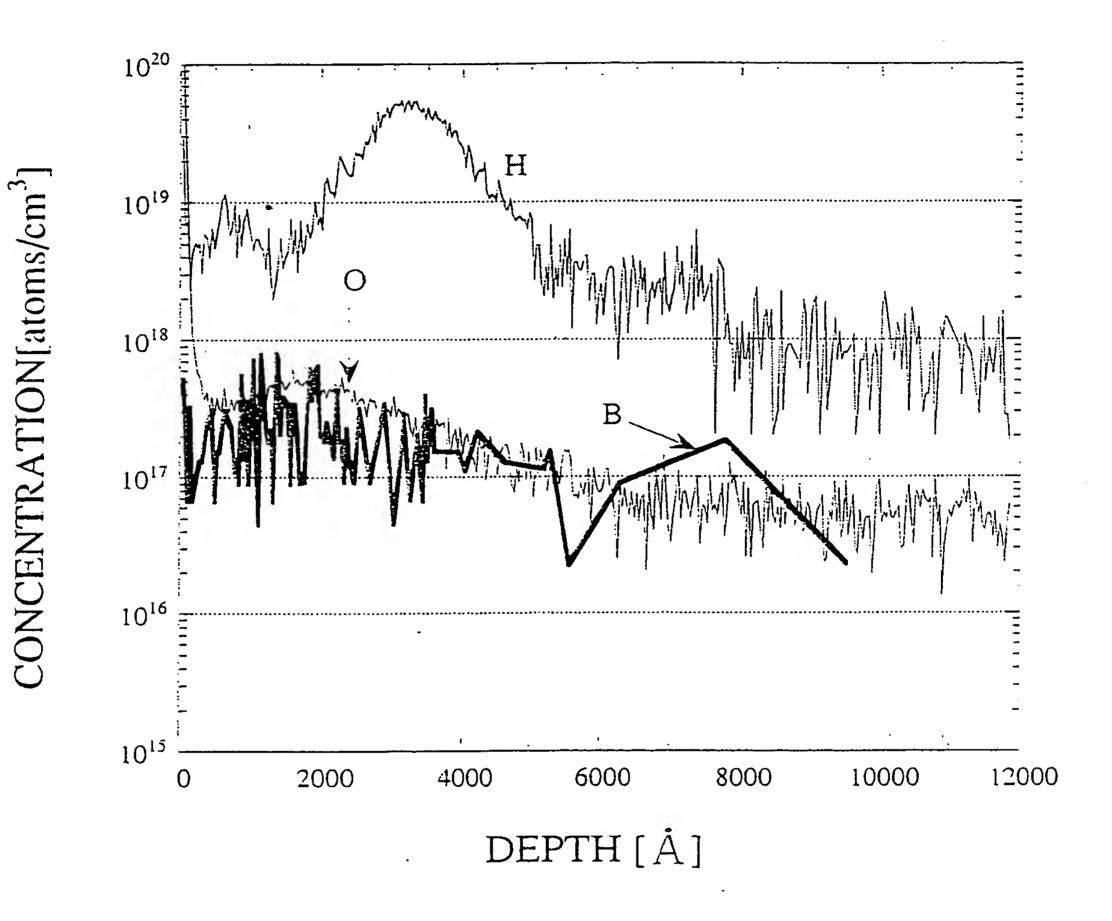


Fig. 25

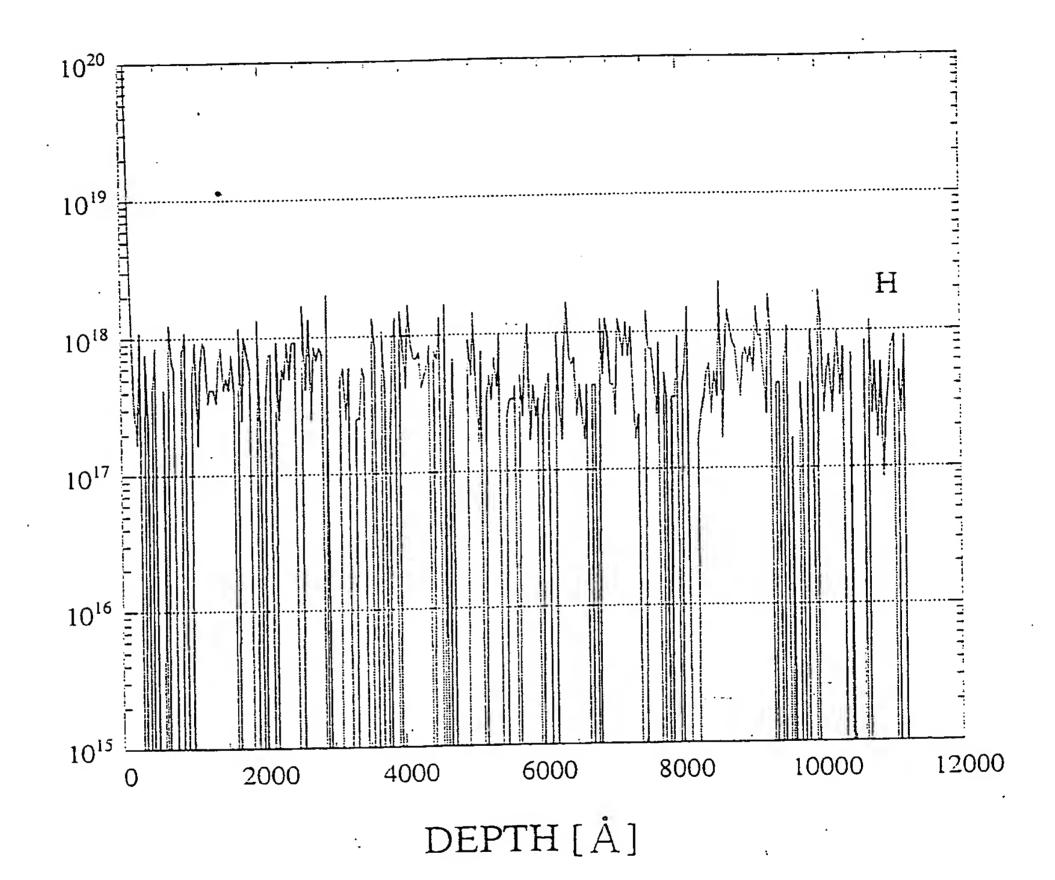


Fig. 26

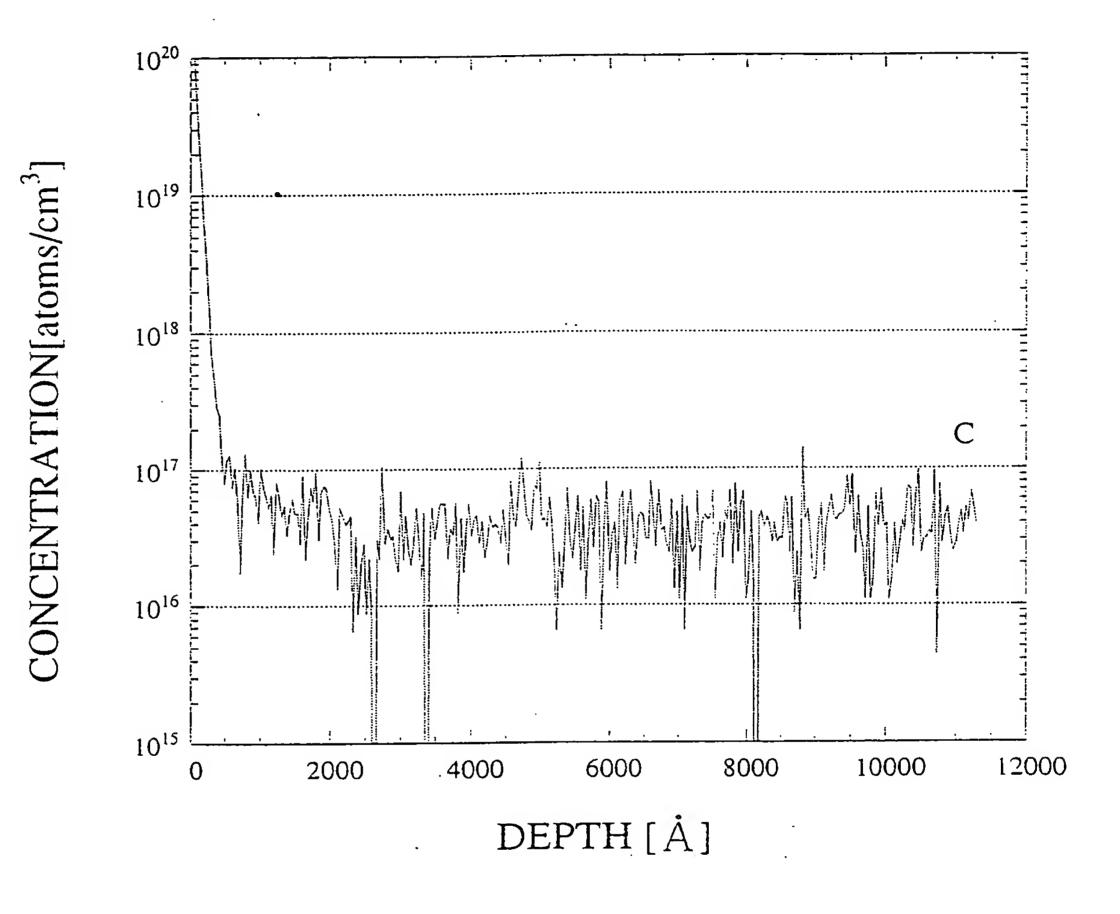


Fig. 27


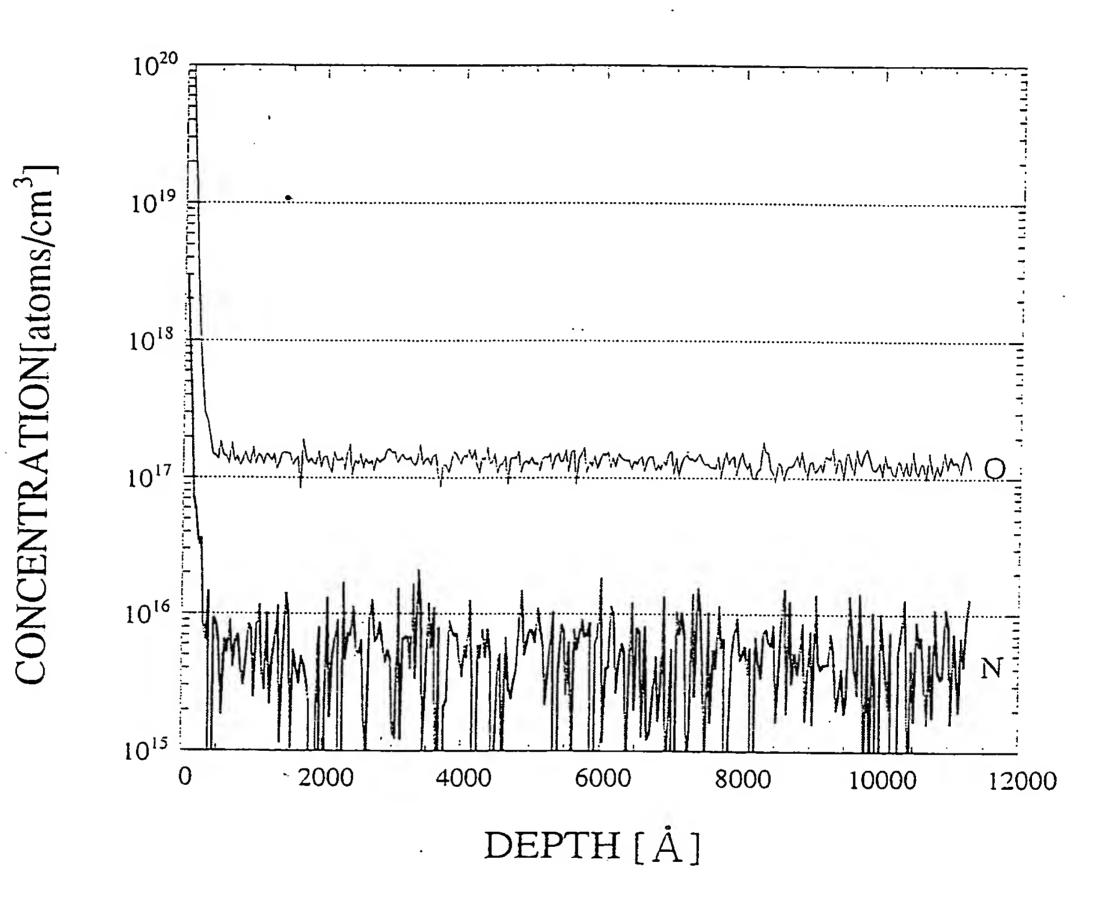


Fig. 28

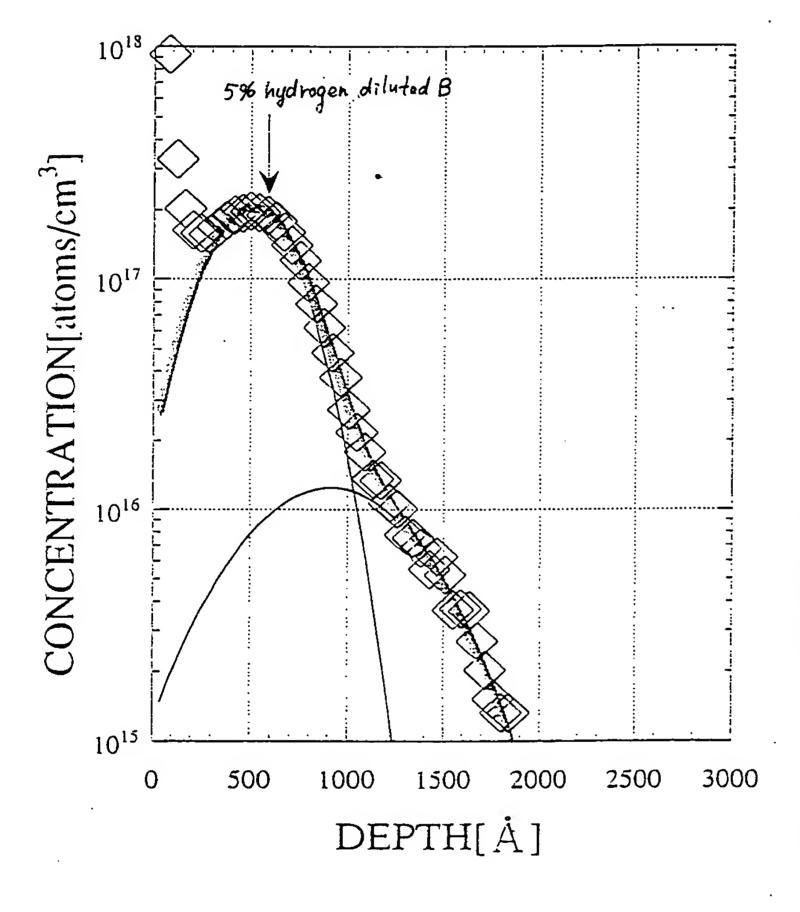

:	5% B fitting
	value
dosage 1	1.1224e÷12
dosage 2	1.3183e÷11
Standard : deviation 1	227.08
Standard deviation 2	422.75
projected ranges	494.37
projected range 2	908.19
χ^2	0.52998
R	i

Gaussian function fitting projected range of B at 30kV (Å)
LSS calculation (into 50 or 5:02)

 B^{+} : ~ 1000 Å B_{2}^{+} : ~ 500 Å

Fig. 29

results 2. 44E-04 1, 430 185. 2 0. 201 -0. 231 1. 70E-11 parameter dielectric constant thickness of oxide channel type value of W Shift_1[V] [v] S-value [V/dec] μ FE (max) kind of TFI value of L 10n 2 Vth Ξ 1011 3 8 6 6 5 6 8 8 9 4 5 6 [sV\Smo] 374 240 220 280 260 200 300 80 60 40 20 0 10 $T_{0x} = 115$ S ည် VG[V] (N-ch, L/W= 7. 1. 0E-12 1. 0E-06 1. 0E-08 1. 0E-09 1. 0E-10 1. 0E-13 1. 0E-05 1. 0E-03 1. 0E-01 1. 0E-02 1. 0E-04 1. 0E-11

Fig. 30

[cm2/Vs]

thickness of oxide film [nm parameters dielectric constant cifannel type μFE(max) [cm2/vs] Shift_1[V] S-value kind of TF value of L value of W [V/dec] [0 n _ 2 Ξ 10ff 5 8 8 4 5 6 4 [cm2/Vs] ηπ 120 120 120 120 120 120 280 200 300 260 240 220 80 60 40 20 0 15 10 $T_{0x} = 115$ 5 / 7. 5, VG[V] (N-ch, L/W=7.-20 1. 0E-13 1. 0E-06 1. 0E-08 1. 0E-09 1. 0E-10 1. 0E-12 1. 0E-04 1. 0E-05 1. 0E-03 1. 0E-02 1. 0E-11 1. 0E-01

- 2

results 2. 65E-04

-1.086

1. 43E-1

1.361

0.308

S

178.